



SCL 90 Durathane Roof Coating



Before



After

What does it do?

SCL 90 Durathane Roof Waterproofing Systems have been developed to solve the problems associated with the long term waterproofing of flat roofs, gutters and pitched roofs.

They provide flexible, durable, long-lasting protection for up to 25 years before first full maintenance, depending upon which system is specified.

The systems provide a cold liquid application with a breathable, seamless finish, which moves with the roof and allows vapour release from the existing substrate.

Where can it be used?

Substrates

Suitable for refurbishing many types of traditional roofing materials, such as:

Felt, asphalt, bitumen, asbestos cement sheet, fibre cement sheet, concrete, profiled metal sheets etc.

Buildings

SCL 90 Durathane Roof Waterproofing Systems are ideally suited for refurbishing and protecting weathered, worn and damaged substrates on many types of buildings:

- Power stations and sub-stations
- Retail units
- Warehouses and distribution centres
- Factories
- Schools and colleges
- Hospitals and care homes
- Garages/forecourts
- Social housing
- Chemical/pharmaceutical plants

System benefits

- Cold liquid applied – no hot works on roof
- Safe to install – unobtrusive repairs
- Easy to apply and detail
- Can be applied over most roof types
- Single pack products
- High solids for long lasting protection
- 10, 15, 20 and 25 year systems available
- Quickly resistant to rainfall
- Permanently elastomeric
- Joint free
- Excellent resistance to ponded water
- Fibre reinforced for maximum film strength
- UV stable
- Easy to maintain – excellent through life costings



Build up of system

Primer

SCL 90 PU Primer promotes adhesion on a range of surfaces with varying conditions where necessary.

Embedment Coat

SCL 90 Durathane Embedment Coat is developed to enable easy embedment of **SCL Glass Fibre Matting**.

Matting

SCL Glass Fibre Matting.

Finish Coat

SCL 90 Durathane Finish Coat is an extremely durable finishing coat, which has excellent weathering properties and UV stability.



How to specify


Due to the high number of possible substrates and varying conditions in which they can be found, always consult a member of the technical department, to determine the exact specification required.

Product appearance

Smooth, plain colour, mid-sheen finish.

Technical support

If you would like any information on SCL products please call: 0131 654 9506 or email us at: info@edinburgh-roofing.co.uk

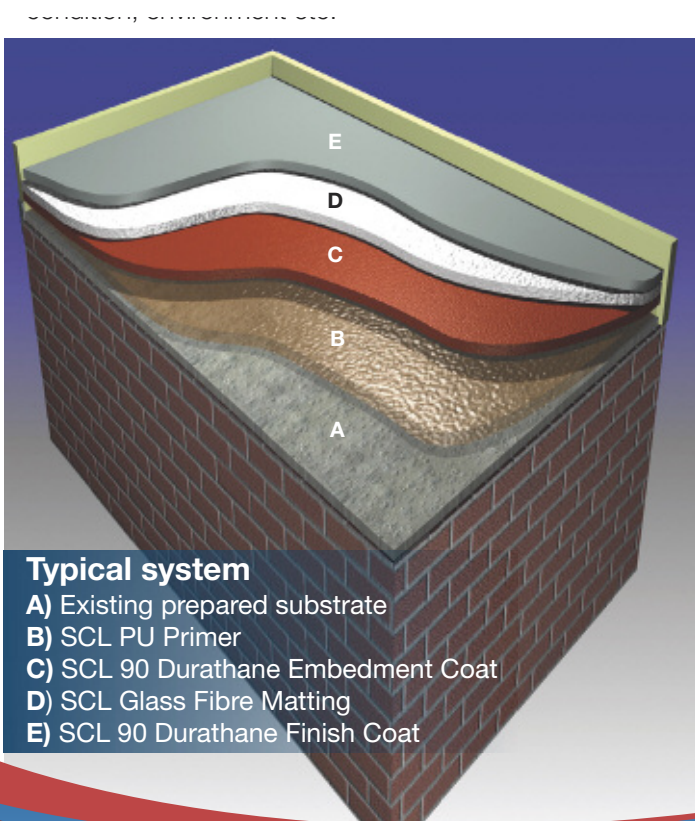

Disclaimer

The information contained herein is to the best of our knowledge true and accurate and is given in good faith, but without warranty. The user will be deemed to have satisfied him/herself independently as to the suitability of our products for his/her own particular purpose. In no event shall Seamless Coatings be liable for consequential or incidental damages.